


C.1 Thermostatic bath mixer for concealed installation # C152000140..

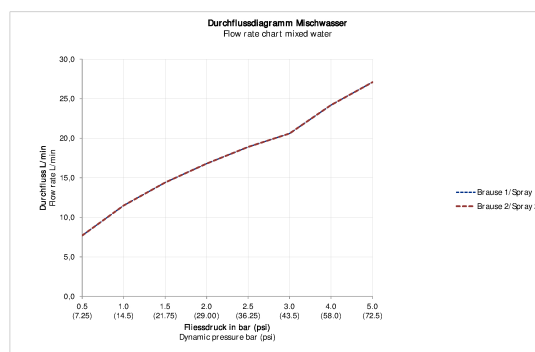

Thermostatic bath mixer for concealed installation	Dimension	Weight	Order number
connection type: basic set for concealed installation, thermostatic cartridge, safety lock at 38°C, round escutcheon Ø 170 mm, flow rate 20,6 l/min (3 bar), diverter bath spout / hand shower, includes: visible parts with functional unit, recommended operating pressure 3 - 5 bar, with shut-off and diverter valve			
Colors			
10 Chrome 46 Black Matt			
Variant			
surface chrome			C152000140..
Necessary accessory			
Bluebox® 12,7 mm (1/2") BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, without shut-off valves, connection size DN15			GK0900000
Bluebox® 19,05 mm (3/4") BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, with shut-off valves			GK0900001

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

C.1 Thermostatic bath mixer for concealed installation #
C152000140..

